



ETSAP
ENERGY TECHNOLOGY SYSTEMS ANALYSIS PROGRAMME



Production of Liquid Biofuels

Technology Brief

IEA-ETSAP and IRENA® Technology Brief P10 – January 2013

www.etsap.org – www.irena.org

This brief is available for download from the following IEA-ETSAP and IRENA sites
iea-etsap.org/web/Supply.asp
www.irena.org/Publications

Copyright © IEA-ETSAP and IRENA 2013

About IRENA

The International Renewable Energy Agency (IRENA) is an intergovernmental organization dedicated to renewable energy. In accordance with its Statute, IRENA's objective is to "promote the widespread and increased adoption, and the sustainable use of all forms of renewable energy". This concerns all forms of energy produced from renewable sources in a sustainable manner and includes bioenergy, geothermal energy, hydropower, ocean, solar and wind energy.

As of December 2012, the membership of IRENA comprises some 160 States and the European Union (EU), out of which 104 States and the EU have ratified the Statute.

About IEA-ETSAP

The Energy Technology Systems Analysis Programme (ETSAP) is an Implementing Agreement of the International Energy Agency (IEA), first established in 1976. It functions as a consortium of member country teams and invited teams that actively cooperate to establish, maintain, and expand a consistent multi-country energy/economy/environment/engineering (4E) analytical capability.

Its backbone consists of individual national teams in nearly 70 countries, and a common, comparable and combinable methodology, mainly based on the MARKAL / TIMES family of models, permitting the compilation of long term energy scenarios and in-depth national, multi-country, and global energy and environmental analyses.

ETSAP promotes and supports the application of technical economic tools at the global, regional, national and local levels. It aims at preparing sustainable strategies for economic development, energy security, climate change mitigation and environment.

ETSAP holds open workshops twice a year, to discuss methodologies, disseminate results, and provide opportunities for new users to get acquainted with advanced energy-technologies, systems and modeling developments.



Insights for Policy Makers

Liquid biofuels are made from biomass and have qualities that are similar to gasoline, diesel or other petroleum-derived fuels. The two dominant liquid biofuels are bioethanol and biodiesel (i.e. 80% and 20% of the market, respectively), that together meet about 3% of the global transport fuel demand and are produced using 2-3% of the global arable land. Bioethanol can be produced from sugarcane, corn, sugar beets, wheat, potatoes, sorghum and cassava. In 2011, the largest producers of bioethanol were the United States (63%), using corn, Brazil (24%), using sugarcane, and China (2.5%). Biodiesel is made from vegetable oils, derived from soybeans, rapeseed, palm seeds, sunflowers, jatropha, as well as from animal fat or waste oils. The largest producers of biodiesel in 2011 were the European Union (43%), the United States (15%), Brazil and Argentina (each around 13%).

The advantage of biofuels is that they can substantially reduce greenhouse gas (GHG) emissions in the transport sector (i.e. between 70% and 90% compared to gasoline) with only modest changes to vehicle technology and the existing fuel distribution infrastructure. The disadvantage is that, apart from sugarcane ethanol, the large-scale production of liquid biofuels based on today's technology and feedstock would compete with food production for arable land and water, with limited expansion potential in certain cases. Also of concern would be the conservation of biodiversity and the risk of important land-use changes. The use of shared international standards is crucial to ensure that liquid biofuels are produced in a sustainable manner, minimising these possible negative environmental and social impact due to land-use change and competition for food.

In several countries, research is currently working on the development of advanced biofuels (i.e. second and third generation biofuels), which are produced from non-food, cellulosic biomass, such as woody and straw residues from agriculture and forestry, fast-rotation plants, non-food crops (possibly grown on marginal, non-arable land), organic fraction of urban waste and algae-based feedstock. These kinds of feedstock require advanced, capital-intensive processing to produce biofuels, but they promise to be more sustainable, offering higher emissions reductions and less sensitivity to fluctuations in feedstock costs. While the production cost of advanced biofuels is still high, improvements in process efficiency and cost reductions are expected from ongoing demonstration projects in many countries, where there are a number of small plants in operation and/or large plants under construction or planned.

Biofuels have been produced since the 1970s, but the market has expanded in the last ten years with a six-fold increase in production. This growth has been driven

by mandates and tax incentives for blending biofuels with fossil fuels for energy security and emissions mitigation reasons. In general, today's biofuels are not yet economically competitive with fossil fuels, with the sole exception of sugarcane ethanol, which enjoys an untaxed retail price as low as USD 0.6-0.65 per litre of gasoline equivalent (lge). In terms of market potential, the International Energy Agency (IEA) projects that sugarcane ethanol and advanced biofuels could provide up to 9.3% of total transportation fuels by 2030 and up to 27% by 2050. However, this would require at least a three- to five-fold increase in land use for biofuels production and significant yield improvements in developing countries.

The future of biofuels hinges on a number of factors. The economic viability will depend largely on the price of biomass and oil-based fuels. A large-scale production of biofuels would increase feedstock demand and prices, requiring a global market—a situation similar as that for oil today. However, technical advances in the production of advanced biofuels from cellulosic feedstock could make available a broader range of non-food biomass (e.g. agriculture and forestry waste), which could ease feedstock supply and prices, and address certain sustainability issues. Policy measures should be very selective in promoting only those biofuels technologies that substantially reduce emissions reductions, avoid adverse land and water uses, and have positive social impacts.,

Highlights

- **Process and Technology Status** – Biofuels are liquid and gaseous fuels produced from biomass. They can complement and/or replace fossil fuels and reduce carbon emissions in the transport sector with only modest changes to vehicle technology and the existing fuel distribution infrastructure. This brief deals with the two major liquid biofuels: bioethanol and biodiesel. Biogas is dealt with in ETSAP P11. Liquid biofuels are usually referred to as conventional or advanced biofuels. **Conventional biofuels** are currently produced in many countries and are based on well-known processes and feedstock (e.g. bioethanol from sucrose and starchy biomass fermentation and biodiesel from esterification of vegetable oils). Global production of these conventional biofuels has been growing rapidly over the past years, reaching the level of 105 billion litres a year in 2010 (i.e. about 3% of transport fuel demand) and using 2-3% of the arable land. Apart from sugarcane ethanol, conventional biofuels will hardly be sustainable in the future as large-scale production would take away feedstock and land from food production and forestry. In addition, they are rather expensive and offer only limited reductions in greenhouse gas (GHG) emissions compared to fossil fuels. **Advanced biofuels** promise to be more sustainable, with higher emissions reductions. They are based on biomass resources and land not used for other primary needs, such as food production and farming. Feedstock includes ligno-cellulosic residues from agriculture and forestry, fast-rotation non-food crops (possibly grown on marginal, non-arable land), organic fraction of urban waste and micro-algae. The conversion of these resources into biofuels requires processes that are currently under commercial demonstration or under development, with small plants in operation and large plants under construction or planned all over the world.
- **Performance and Costs** – Energy input, GHG emissions and the costs of biofuel production are very sensitive to feedstock, processes, co-products and local conditions. The use of international standards is therefore crucial to assess biofuel benefits and costs. Among conventional biofuels, **sugarcane ethanol** is the most viable option: under favourable conditions, the life cycle reduction of GHG emissions can reach a level of 70-90% compared to gasoline; even more than 100% if co-products are accounted for. Its untaxed retail price can be as low as USD 0.6-0.65 per litre of gasoline equivalent (lge), depending on the feedstock price (i.e. 60% of the total cost). All other conventional biofuels are less attractive. Advanced biofuels are rather costly at present (USD 1.0-1.2/lge) with about 50% of the cost due to the investment, but they promise GHG reductions comparable to sugarcane ethanol and declining costs over time. The investment cost of a production plant for ad-

vanced biofuels with a capacity of 50-150 Ml/yr is estimated to range between USD 125-250 million. In general, both conventional and advanced biofuels are not yet economically competitive with fossil fuels and, with the sole exception of sugarcane ethanol, they depend on sugar and oil prices. They are predicted to become competitive with oil prices above USD 130/bbl and/or high carbon prices. Technology improvements could enable ligno-cellulosic biofuels to compete at oil prices of USD 60-70/bbl (IPCC SRREN).

- **Potential and Barriers** – International Energy Agency (IEA) scenarios suggest that sugarcane ethanol and advanced biofuels could provide up to 9.3% of transportation fuels by 2030 and up to 27% by 2050. These estimates are based mostly on available agriculture/forest residues and non-food energy crops, 10% of which (i.e. 7.5 Gt/yr by 2030) could provide 120-150 billion lge of liquid biofuels (i.e. almost 50% of the 2030 biofuels demand). However, estimates for global biomass potential vary considerably. Recent analyses suggest a potential production of 85 EJ (including biofuels and bioenergy) from agricultural and forestry residues by 2050, 60 EJ from surplus forest growth and 120 EJ from surplus arable land used for dedicated energy crops. While the amount of surplus arable land is uncertain, this potential exceeds the 2050 IEA-projected bioenergy demand (i.e. 65 EJ biofuels and 80 EJ heat and power). Depending on residue availability and food production, the land used for energy crops could grow from today's 30 Mha to 100-160 Mha by 2050, with significant yield improvements in developing countries. At present, potential areas have been identified in a few countries but their use is still controversial due to water availability. In the future, the competitiveness of advanced biofuels will depend on prices of feedstock and fossil fuels. Access to ligno-cellulosic feedstock could reduce biofuel prices, while larger production could increase feedstock demand and prices. Policy measures (e.g. mandates and incentives) for blending biofuels with fossil fuels are now in place in many countries and foster market growth. However, policies should only promote biofuels with best performance in terms of GHG reduction and land-use. Environmental impacts (e.g. the extensive production of biodiesel from palm oil) are to be avoided. The United States has set specific targets for advanced biofuels (i.e. 60 billion litres by 2022) but requires a reduction of 50-60% of GHG emissions. on a lifecycle basis. In the European Union, biofuels have to provide at least a 35% GHG reduction compared to fossil fuels. A potential for biofuel production has been identified in developing countries and emerging economies (e.g. Brazil), but measures are needed to ensure sustainability and avoid land-use changes.

Process and Status

Biofuels are liquid and gaseous fuels that are produced from biomass feedstock. They can complement and/or replace fossil fuels and reduce carbon emissions in the transport sector with only modest changes to vehicle technology (i.e. engines) and to existing infrastructure for fuel distribution. Depending on the feedstock type and the maturity and sustainability of the production process, biofuels are referred to as *conventional* (1st generation) or *advanced* (2nd and 3rd generation) biofuels. *Conventional biofuels* are based on commercial feedstock and processes currently in use in many countries. They include liquid fuels, such as bioethanol¹ from sugar- and starchy crops, biodiesel² from oil crops and waste oil, and biogas for anaerobic digestion and other processes. This brief deals with liquid biofuels, primarily bioethanol and biodiesel, while biogas and related applications are dealt with in ETSAP P11, E05 and T03. Apart from sugarcane ethanol, most of today's liquid biofuels scarcely appear to be sustainable in future because large-scale production would compete with food production in terms of feedstock, arable land and water use. In addition, they are rather expensive and offer only a limited reduction of greenhouse gas (GHG) emissions compared to fossil fuels, with high emissions abatement costs. Major drawbacks also include risks for biodiversity and deforestation (i.e. land-use change). *Advanced biofuels* promise to be much more sustainable as they are based on biomass resources not used

- 1 Bioethanol is a high-octane fuel used to replace and complement gasoline in spark-ignition engines and to reduce CO₂ emissions. Oxygen in its molecular form enables a relatively low-temperature combustion, which also reduces the emissions of CO, NO_x and volatile organic compounds (VOC). If a large amount of fertilisers is used to grow the feedstock, bioethanol could lead to increased N₂O emissions on a life cycle basis. Other drawbacks include miscibility with water, aldehyde emissions, compatibility issues with some plastics and metals and high latent vaporisation heat (i.e. cold start issues). Benefits from ethanol combustion (e.g. high compression ratio) compensate for the low energy content compared to gasoline. Conventional spark-ignition engines can run with 5-10% (E5, E10) ethanol-gasoline blends with almost no technical changes. *Flex-fuel vehicles* (several million in use in Brazil, the United States and Sweden) can run on up to 85% ethanol blend (E-85) with only modest technical changes (ETSAP T06). Ethanol can also be used in compression ignition (diesel) engines if additives are used to compensate for its low cetane number.
- 2 Biodiesel is a high-cetane fuel, which can be fully blended with fossil diesel to run compression ignition engines. It offers low emissions of GHG, sulphur compounds and particulate matter compared with fossil diesel. In current practice, a 5-20% (B5, to B20) 1st generation biodiesel (fatty acid methyl ester, FAME) is blended with fossil diesel. A full blending (up to B100) is possible for advanced biodiesel.

for other primary needs (e.g. food production, farming), such as ligno-cellulosic residues from agriculture and forestry, fast rotation plants, non-food crops (possibly grown on marginal or non-arable land), organic fraction of urban waste and algae-based feedstock. However, the conversion of this feedstock into biofuels requires advanced processes that are still under commercial demonstration (e.g. production of cellulosic ethanol, biomass-to-liquid diesel) or under development (e.g. algae-based biofuels). Large-scale production of biofuels would also involve a logistic infrastructure to collect a large amount of feedstock.

Commercial production of liquid biofuels (bioethanol) started in the 1970s in Brazil and the United States, based on sugarcane and corn feedstock, respectively. Over the last ten years, liquid biofuel production has been growing rapidly in many countries, boosted by mandates and tax incentives for blending biofuels with fossil fuels for road transport. This is part of the policy for energy security and mitigation of GHG emissions. The global production (mostly based on conventional biofuels) has grown from 16 billion liters in 2000 to about 105 billion liters in 2010 (i.e. 82% bioethanol and 18% biodiesel), accounting for about 3% of today's transport fuel on an energy basis [1] and using almost 3% of global arable land. Leading bioethanol producers in 2011 are the US (i.e. 63% of the global production, mostly from corn) and Brazil (i.e. 24%, mostly from sugarcane). While 58% of world biodiesel is produced in the EU (i.e. mostly in Germany from rapeseed oil), also with important production in Thailand and Malaysia (palm oil biodiesel). Brazil and the US are also major consumers of bioethanol (i.e. 21%³ and 4% of the domestic road transport fuel, respectively) while Europe is the largest consumer of biodiesel (i.e. about 2% of the transport diesel fuel). Commercial production of 1st generation biofuels in emerging and developing countries (e.g. Argentina, Brazil, China, Thailand, Malaysia) represents an income opportunity for rural communities, but the compliance with sustainability criteria and standards is often questionable. For example, in some countries the extensive cultivation and trading of palm oil for biodiesel production has resulted in land-use change and deforestation. In 2011, biofuel trading from Brazil, Latin America and South East Asia to the EU, Japan and the US reached the level of 0.8 billion litres of bioethanol and 2.8 bln litres of biodiesel (mainly Argentina and Indonesia exporting to the EU) [2].

The International Energy Agency (IEA) estimates that the use of liquid biofuels could grow rapidly in the coming years, reaching a level of 9% (11.7 EJ) of the total transport fuel (126 EJ) by 2030 [4] and about 27% by 2050 [5]. This could avoid the emission of around two billion tonnes (Gt) of CO₂ per year and contribute significantly to halving GHG emissions by 2050, compared with their current levels.

3 Bioethanol consumption is 12.2% hydrous, and 8.4% anhydrous.

Some 90% of this contribution would come from advanced biofuel technologies that are not yet commercially available. Several pilot and demonstration plants producing advanced biofuels are already in operation or have been announced for the next years in both OECD and non-OECD countries. Soon the production capacity for advanced liquid biofuels is forecast to reach the level of about 175 million litres of gasoline equivalent (lge) per year [1], with an additional capacity of 1.9 billion lge/yr under construction or planned and further 6 billion lge/yr potentially available in a few years. To put these figures into context, the advanced biofuel penetration envisaged by the IEA in its mitigation scenarios is 250 billion lge/yr by 2030.

Conventional Biofuel Technologies – The production of 1st generation biofuels is based on well-known technologies that are still evolving to improve energy efficiency and reduce GHG emissions and costs.

- **Bioethanol** – Commercial bioethanol can be produced from many types of feedstock, including sugarcane, sugar beets, corn (maize), wheat, potatoes, sorghum and cassava. Production from sugar crops (i.e. sugarcane, sugar beet, sorghum) is based on the fermentation of sucrose followed by distillation to fuel-grade ethanol. Production from sugarcane is particularly easy and efficient because a considerable amount of sucrose is readily available, and crushed stalk (bagasse) can be used to provide heat and power to the process, as well as to other energy uses. If starchy crops (e.g. corn) are used as the feedstock, an additional step (hydrolysis) is needed to convert starch into sugar, followed by fermentation and distillation. The low efficiency of the starch conversion can be improved (and the costs lowered) using enzymatic hydrolysis and valorising co-products (e.g. animal feed). Apart from sugarcane ethanol, bioethanol production is a rather energy-intensive process whose economic and environmental benefits are sensitive to the technology process, feedstock and co-product prices.
- **Biodiesel** – Commercial production of biodiesel is based on trans-esterification of vegetable oils (chemically or mechanically extracted from rapeseed, palm seeds, sunflowers, etc.), animal fats and waste oil through the addition of methanol (also biomethanol or other alcohols) and catalysts, with glycerine as a by-product. Biodiesel production from animal fats and waste oils is cheaper and more efficient, but the basic feedstock is limited. In principle, some vegetable oils could be used directly as a fuel, but this would involve risks for the vehicle engine.
- **Advanced Biofuel Technologies** – To address the sustainability issues of conventional biofuels, advanced biofuel technologies focus on non-food

feedstock, including agriculture and forest residues, organic and woody fraction of urban waste, short-rotation forestry (e.g. eucalyptus, poplar, robinia, willow), genetically modified crops and perennial grasses (e.g. miscanthus, switch grass, jatropha) grown on marginal, non-arable land, though with moderate yields. Most of this feedstock is ligno-cellulosic biomass consisting of 50-75% (dry mass) cellulose and hemicellulose and the remaining lignin, a phenolic compound. The lignin content is usually high in woody biomass and lower in agriculture waste and perennial grasses. The conversion of ligno-cellulosic feedstock into liquid biofuels is based on two main processes (i.e. biochemical and thermochemical conversion [6]) whose commercial feasibility is currently under demonstration in a number of plants all over the world. These processes exploit not only the sugar, starchy and oil components of the feedstock but also all the available ligno-cellulosic materials, thus considerably enlarging the available biomass resource.

- **Biochemical Process** – The biochemical process is based on enzymatic or acidic hydrolysis to convert cellulose and hemicellulose into sugars, followed by fermentation and distillation to ethanol, the same as the conventional process. Converting cellulose into sugar is more challenging than converting starchy biomass for 1st generation biofuels since the lignin tends to inhibit hydrolysis and must be removed. To facilitate the process, a pre-treatment (e.g. biological, physical or chemical) is needed to comminute the feedstock. The need for pre-treatment and enzymes for hydrolysis makes the overall process rather costly though enzymatic hydrolysis is cheaper than acidic hydrolysis. Research efforts aim to reduce enzyme costs, recycle enzymes, increase the efficiency of pre-treatment (e.g. steam explosion technique), improve lignin separation and obtain simultaneously saccharification and fermentation. Lignin can be used as a source of chemicals or as fuel for heat and power generation.
- **Thermo-chemical Process** – The thermo-chemical process (i.e. biomass-to-liquid, BTL) is similar to the process to produce liquid fuels from coal (see ETSAP P05). It includes biomass pre-treatment, gasification at around 850°C in controlled air/O₂ atmosphere to produce syngas⁴, clean-up of syngas and the well-known catalytic Fischer-Tropsch (FT) conversion to produce a variety of fuels – basically diesel and jet fuel from low-temperature FT, and gasoline and chemicals from high-temperature FT. The process offers a number of variants and products: the syngas can also be used to produce hydrogen (shift reaction), methanol, ethanol and DME. In principle, the gasification could be stopped at the pyrolysis stage (450-600°C) to produce

4 Synthetic gas (syngas) is a mix of CO and H₂, plus CO₂, CH₄ and impurities

bio-oil (syncrude) for refinement. Various options exist regarding the key components of the process, such as the gasifier (i.e. fixed bed, fluidised bed and large-scale entrained-flow gasifier), the FT reactors and the catalysts. The process does not produce lignin since all the ligno-cellulosic matter is gasified. Biomass gasification is an energy- and capital-intensive process. Research efforts aim to improve its performance and reliability, impurity separation and FT conversion and to reduce costs.

- **Hydrogenation of Vegetable Oils** – The catalytic hydrogenation of vegetable oils (HVO) and animal fats, followed by cracking [6], is an alternative process to produce high-quality biodiesel. This process requires a considerable amount of hydrogen, but it is well-known and close to market uptake, with several demonstration plants in operation.
- **Algae-based Biofuels** – Algae have recently gained attention as a potential feedstock for biofuels. In principle, they offer high yields (i.e. several times the yield of palm feedstock, [6]) and large CO₂ absorption by photosynthesis, with up to 90% lower water needs than terrestrial crops, possible use of saline or waste water and no need for arable land. Algae contain approximately 33-50% lipids and triglycerides for biodiesel production, the rest being sugar and proteins for bioethanol production. They are considered primarily for biodiesel and jet fuel production since fewer alternatives exist to replace these fuels. However, algae cultivation in open ponds requires regions and sites with the appropriate climate, sunshine and water nutrients, whereas alternative cultivations in closed photo-bioreactors are very expensive. In addition, cultivations are vulnerable to contamination, and an efficient technology is needed for oil extraction. A number of pilot and demonstration projects exist all over the world, but there is consensus that commercial production of algae biofuels, also referred to as 3rd generation biofuels, will take at least ten years to materialise.
- **Other Processes and Fuels** – Many other processes can provide biofuels. **Fast pyrolysis** (i.e. low-temperature 400-600°C gasification in the absence of O₂, followed by quick cooling at 100°C to obtain a condensed oil) can convert biomass into bio-oil to be refined into diesel [6]. Pyrolysis enables the use of larger size (5mm) biomass particles, thus saving pre-treatment costs in comparison with other processes. It is rather energy-intensive, with products depending to a certain extent on how fast heating and cooling occur. Pyrolysis oil can be rather acidic and corrosive, thus requiring more expensive storage and handling. A by-product is bio-char, which can be used as solid fuel or as a fertilizer. The **hydrothermal process** consists of a biomass treatment with pressurised water at temperatures of 300-400°C, which can produce bio-oil

with a lower water and oxygen content than fast-pyrolysis oil. The **biological and chemical conversions of sugar into alkanes** are alternative processes for producing sugar-based ethanol and butanol from ligno-cellulosic feedstock. Butanol has a higher energy density (29.2 MJ/l) than ethanol and is more similar to gasoline. Another option is the production of **dimethylether (DME)** from biogas via conversion into methanol, followed by distillation and dehydration using zeolite catalysts. DME is a high- cetane fuel, which can be used in diesel engines or to replace propane in liquefied petroleum gas (LPG). Unlike methanol, DME is not toxic, emits less NO_x and SO_x than fossil diesel and no PM, but its energy content is 50% lower than that of fossil diesel [6]. It can also be used for cooking and heating. **Biomass-based hydrogen** can be obtained by steam reforming of bioethanol and methanol or even from biomass gasification, followed by syngas water shift reaction and separation (i.e. pressure swing absorption, cryogenic or membrane separation) with CO₂ as a by-product. Biological production of hydrogen is also under investigation. In comparison with other fuels, hydrogen offers a high energy density (120MJ/kg) per unit of mass but a very low energy density in volume. Its use as a practical, commercial fuel requires further R&D and time (ETSAP P11). Processes for biofuel production that require medium- to high-temperature heat can be combined with concentrating solar power to create important efficiency and economic synergies (Etsap TB E10).

- **Biorefineries** – The same as oil refineries, biorefineries consist of a cluster of facilities to convert diverse biomass into a variety of biofuels and by-products that would enable a more efficient use of basic resources and investment in comparison with the current biofuel production. Pulp and paper production plants that also produce electricity from black-liquor residues can be regarded as an early example of a biorefinery.

A graphic overview of feedstock, processes and output for advanced biofuels is given in Figure 1. The IEA [1] provides a qualitative evaluation of the level of maturity of biofuel technologies (Figure 2). Advanced biofuels that are close to commercialisation (e.g. cellulosic ethanol, BTL/FT diesel and HVO) are expected to demonstrate reliable operation within five years and achieve commercial-scale production in ten years, with at least a 50% life cycle reduction of GHG emissions compared to conventional fuels. More time is needed for algae-based biofuels and biorefinery process integration. R&D efforts are in place in many countries with an increasing global spending (i.e. USD 800 million in 2009 [7]). Global standards may help improve quality and sustainability of biofuel production.

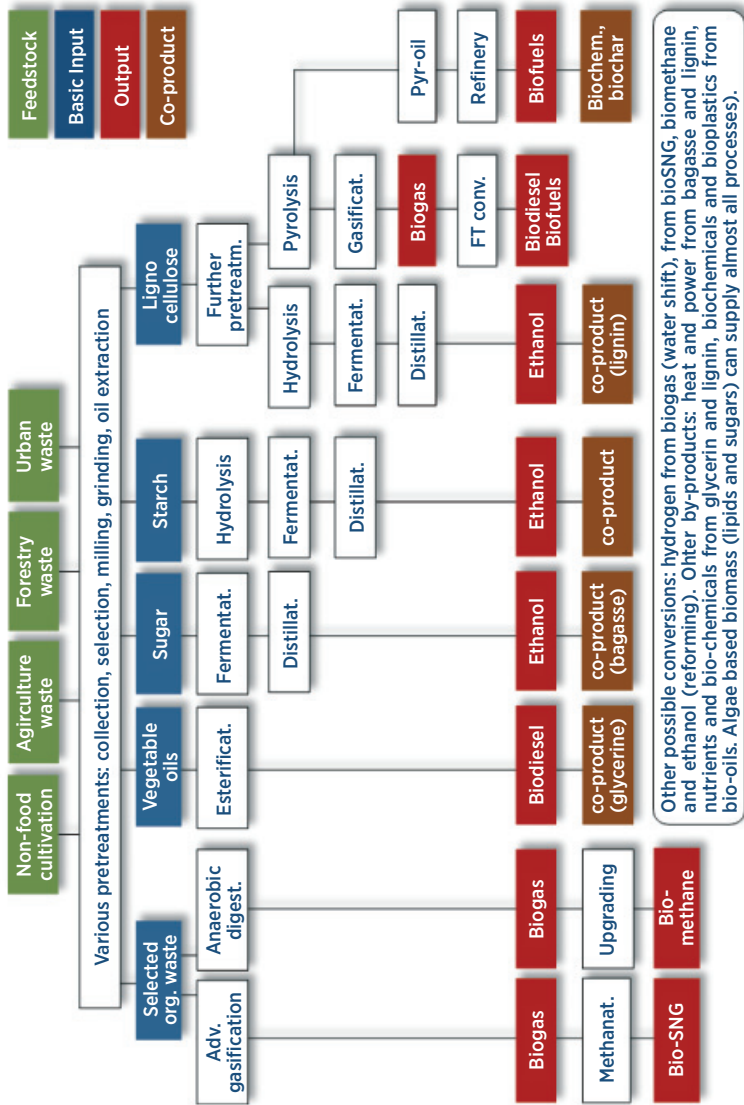


Figure 1 – Feedstock, Processes and Output for Sustainable Biofuel Production

R&D	Demo	Pre-comm.	Commercial
	cellulosic ethanol		sugar/starch ethanol
algae diesel	BTL diesel	HVO diesel	trans-ester. diesel
novel fuels, furanics	DME, biobuth., methanol, pyrolysis		
	bio-SG		biogas-AD
H ₂ R&D	H ₂ gasific., reforming	H ₂ biogas reforming	

Figure 2 – Status of Biofuel Technologies [1, 8]

Performance and Sustainability

Energy and fossil fuel input, as well as GHG emissions involved in biofuel production, are very sensitive to the feedstock (i.e. type, yield, fertilizers used for cultivation), conversion process, co-products and local conditions. All these elements are sources of significant uncertainties in estimating biofuel performance in terms of energy efficiency and GHG emissions. In many processes, technology variants or bad management may lead to a significant increase in emissions, thus eliminating most of the benefits. In contrast, benefits can increase considerably if the energy input is provided by the feedstock itself and by-products are accounted for. It is also clear that feedstock cultivation should avoid land-use changes of arable and forestry areas and maximise as much as possible the exploitation of waste and residues and the use of non-arable lands or degraded soils for growing non-food energy crops. International initiatives (e.g. Global Bioenergy Partnership) offer recommendations and criteria to assess the sustainability of biofuel production, and some countries have already set standards. In the EU Renewable Energy Directive, biofuels must provide at least a 35% GHG emissions saving compared to fossil fuels to be eligible for the EU emissions reduction targets; for new plants, this threshold will increase up to 50% by 2017. In the United States, advanced biofuels must demonstrate a minimum GHG reduction of between 50-60% on a life cycle basis, including land-use change. Estimates of biofuel emissions reduction usually refer to life cycle emissions avoided with respect to fossil fuels for a certain feedstock and production process and account for fossil energy input (i.e. fuel,

electricity with the relevant energy mix, heat) and fertilisers used to grow feedstock. Estimates usually do not account for possible emissions associated with land-use changes for feedstock cultivations. The IEA [1] has reviewed a number of analyses [9, 10, 11]. Results show that many conventional biofuels offer moderate reductions in GHG emissions compared with equivalent fossil fuels. Among conventional biofuels, sugarcane ethanol is the most efficient technology because sugar crops offer high yields, sugar extraction is easy, and bagasse can be used to provide heat and power to the process. With all these conditions in place, the fossil energy input to the process can be very low and bioethanol can offer a 70-90% reduction of the life cycle CO₂ emissions compared with fossil gasoline (i.e. -2.8 kgCO₂/l), if no land-use change occurs. Even more than a 100% GHG emissions reduction can be achieved if co-products are accounted for. The balance is less favourable for feedstock other than sugarcane. Ethanol from sugar beets, corn, cereal grains and conventional biodiesel require higher energy input and offer lower CO₂ emission reductions. The use of recycled oils and animal fats is also very attractive in terms of CO₂ reductions, but the basic resource is limited. Advanced biofuels (e.g. ligno-cellulosic ethanol, BTL diesel) also offer very high performance (i.e. more than 100% emission reduction) although processes are less proven and consolidated. Typical values and ranges for land-use yields, co-products and CO₂ emissions reduction for conventional and advanced biofuels are given in Table 1. For some processes and feedstock, the CO₂ balance can be negative, meaning that the production and use of biofuels generate more emissions than fossil fuels.

Apart from sugarcane ethanol, the energy balance (i.e. energy output-to-input ratio) of conventional biofuels is modest (e.g. 1.3-1.65 for corn ethanol) while advanced biofuels (e.g. ligno-cellulosic ethanol) offer values of 4.4 to 6.6 [12]. The typical energy efficiency (i.e. biofuel-to-feedstock energy content ratio) of ligno-cellulosic biofuels from agriculture and forest residues range from 12-35%, assuming a biomass energy content of 20 GJ/t (dry biomass), a biofuel yield of 110-300 litres of ethanol (22.3 MJ/l) or 75-200 litres of biodiesel (34.4 MJ/l) per tonne of biomass [6, 13, 14]. To put these figures into context, the maximum theoretical efficiency achievable in converting all ligno-cellulose carbohydrates into ethanol is about 50%. This limit may be exceeded if the energy content of lignin is accounted for. Efficiency translates into land-use, considering that the agriculture yields of cereal straw and corn stover is about 3-5t/ha and 4-6t/ha, respectively (dry biomass).

Typical figures for advanced biofuel production plants (i.e. size, capacity factor, logistics and biomass supply area) are given in Table 2. It should be noted that, during the harvesting season, commercial sugarcane ethanol plants can handle some 300,000 tonnes of biomass over 6-7 months and that large, commercial 2nd generation plants could handle up to 600,000 t/yr, with more complex logistics.

Table 1 – Current and Projected Biofuel Yields and Life Cycle CO₂ Reduction compared to Fossil Fuels [1]

Feedstock/Biofuel	Yield 2010 (2050) (Ide-lge/ha) ⁵	Co-products (kg/l biofuel)	CO ₂ reduction vs. fossil fuels %
Sugarbeet Ethanol	2800 (3700)	0.25 Beet pulp	25 to 65
Corn (maize) Ethanol	1800 (2400)	0.3 DDGS	-20 to 60
Sugarcane Ethanol	3900 (4800)	2.5 Bagasse	70 to 105
Cellulosic Ethanol/SRC	2200 (3700)	0.4 Lignin	50 to 110
Rapeseed Diesel	1500 (2100)	0.1 Glycerine 0.6 Presscake	15 to 85
Soy seed Diesel	600 (900)	0.1 Glycerine 0.8 Bean meal	na
Palmseed Diesel/FAME	3200 (4800)	0.1 Glycerine, 0.25 Bunches	25 to 80
BTL Diesel/SRC	3100 (5200)	Low-temp heat, Pure CO ₂	55 to 120
HVO Diesel	2000 (3400)	0.1 Glycerine	15 to 84
Algae Diesel	Na	Several	-50 to 65

Notes: Biofuel yields do not account for land-use reduction due to co-products. Emissions from land-use change are not included. Emission savings of more than 100% are due to the use of co-products. One litre of ethanol=0.65 lge. One litre of biodiesel = 0.90 Ide. One litre of adv. biodiesel = 1Ide. The average yield of woody crops from short rotation coppice (SRC) = 15t/ha. IEA analysis based on yields and emissions from sources [6, 22, 27, 28, 29, 30, 31, 32, 33, 34, 35] and [18, 36, 37]

5 Ide-lge/ha: Litres of diesel equivalent (Ide), litres of gas equivalent (lge)

Table 2 – Typical Figures for Advanced Biofuel Production [6]

Type	Plant capacity l/yr	Capacity factor hr/yr	Biomass oven dry t/yr	Truck traffic -	Biomass production area (*) %
Pilot	15k-25k	2000	40-60	3-5/yr	1-3, 1km
Demo	40k-500k	3000	100-1200	10-140/yr	5-10, 2km
Pre-comm.	1M-4M	4000	2k-10k	25-100/m	1-3, 10km
Comm.	25M-50M	5000	60k-120k	10-20/day	5-10, 20km
Large comm.	150M-250M	7000	350k-600k	200-400/ day	1-2, 100 km

(*) % of land within an area of given radius

Current Costs and Cost Projections

Biofuel costs and prices depend on the highly variable prices of feedstock and the capital costs of production plants. Commercial competitiveness of biofuels also depends on the variable prices of conventional fuels (i.e. gasoline and diesel). This means that current prices, price projections and economic competitiveness of biofuels are all highly variable and sensitive to market conditions.

Conventional Biofuels – In general, biofuels are not yet economically competitive with conventional fuels (i.e. gasoline and diesel), the sole exception being the Brazilian sugarcane ethanol. Thus, promotion policies are still needed to aid the market uptake of biofuels and enable the cost reductions associated with large-scale production. The cost of conventional biofuels is very sensitive to the feedstock price, which accounts for 50-60% of the final cost of Brazilian sugarcane and for between 80-90% of the cost of palm biodiesel, corn ethanol and rapeseed diesel (assuming a biomass cost of USD 2-3/GJ and an energy content of 20 GJ/t). However, actual feedstock prices depend largely on local conditions. For example, reported prices of sugarcane tops/leaves are USD 3-8/t (fresh matter) in Brazil, USD 8-15/t in Thailand and USD 20-30/t in India [16, 17, 25]. Also uncertain is the cost of dedicated non-food cultivations. Biomass transportation costs also vary considerably from a typical US\$ 0.1/t-km for ocean shipping to US\$ 10/t-km for road transport.

The cost of conventional biofuels is unlikely to decrease significantly over time as the cost of conventional feedstock tends to increase in both energy and non-energy markets. As a consequence, the economic competitiveness of conventional biofuels is expected to remain questionable in the absence of a significant increase in the current oil price. The IEA analysis [15] suggests that, with corn prices between USD 150-250/tonne (without subsidies), the US corn-based ethanol is only profitable for oil prices above USD 90/bbl and USD 130/bbl, respectively, while subsidies set much lower profitability thresholds (i.e. above USD 50/bbl and USD 90/bbl, respectively). The emissions reduction cost of conventional biofuels is also high (above USD 200-300/tCO₂).

Advanced Biofuels – At present, advanced biofuels are significantly more expensive than conventional biofuels, but their cost is expected to become more attractive over time. For all processes, the cost of a commercial-scale production is highly uncertain and sensitive to feedstock prices and local conditions, but technology advances and cost reductions are more likely to occur for the biochemical production of ethanol than for the well-known BTL process. To become economically competitive with sugarcane ethanol and conventional gasoline, the typical price of advanced biofuels (either BTL-diesel or ligno-cellulosic ethanol) should be as low as USD 0.6/lge, almost 50% below the current level. It is worth noting

that available analyses [18] suggest that in countries, such as South Africa, Brazil and Thailand, the production cost of advanced biofuels could be about 33% lower than the international cost. In these estimates, investment costs account for 50%, feedstock for 35%, and O&M and energy for the rest, an important factor being the plant capacity factor. In some countries (e.g. Brazil and South Africa), the use of bagasse (USD 4-8/t) from sugarcane ethanol production as the basic feedstock for advanced biofuels could be even more attractive due to the high concentration and the lower impact of transportation.

Advanced biofuels are more capital-intensive than conventional biofuels. The investment costs for a commercial-scale plant with a capacity between 50MI/yr and 150MI/yr range from USD 125-250 million [6] – that is, up to ten times more than a conventional biodiesel plant with the same capacity. Investment costs vary considerably as a function of the biomass pre-treatment and conversion process.

The IEA [1] provides estimates of typical international biofuel retail prices (untaxed), which account for feedstock, conversion process, fuel distribution and value of co-products (Table 3). Because biofuels differ from fossil fuels in terms of energy content (e.g. ethanol energy content by volume is two-thirds that of gasoline), biofuel costs are usually given as US dollars per litre of gasoline or diesel equivalent (lge or lde). For conventional biofuels, the dominant cost element is the feedstock cost

Table 3 – Typical Biofuel Retail Prices (untaxed) and Price Projections (USD/lge) [1, 6]

	2010	2020		2030		2050	
		Low	High	Low	High	Low	High
Sugarcane Eth.	0.62-0.64 ^a	0.6	0.7	0.6	0.7	0.6	0.73
Corn Ethanol	0.71-0.76 ^b	0.7	0.8	0.65	0.85	0.65	0.85
Cellul. Ethanol	1.0-1.1 ^c	0.9	1.05	0.8	0.95	0.75	0.9
Rape Biodiesel	0.98-1.03 ^d	0.95	1.1	0.95	1.15	0.95	1.2
BTL Biodiesel	1.0-1.2 ^c	0.9	1.05	0.8	1.0	0.75	0.9
Biosynthetic gas SG	0.90	0.85	0.95	0.75	0.9	0.65	0.8
Fossil Gasoline	0.53-0.54 ^e	0.7	0.7	0.8	0.8	0.85	0.85

Cost structure:

a) Feedstock 60%; energy 29%; process 11%; co-product 0%; (lowest reported production cost: USD 0.3/lge)

b) Feedstock 85%; energy 21%; process 21%; co-product -27%;

c) Feedstock 42%; energy 16%; process 42%; (long term)

d) Feedstock 90%; energy 6%; process 7%; co-product -3%; (highest reported production cost: USD 1.7/lge)

e) At oil price of USD 75/bbl

(50-90%) while, for advanced biofuels, the investment cost would be more important (40-50%), with feedstock accounting for 35-40%. Co-products (e.g. glycerine, bagasse, lignin, waste, heat and power) can reduce the biofuel cost by up to 15-20%. The IEA also provides scenarios for biofuels prices and competitiveness (Table 3). In the low-cost scenario, sugarcane ethanol remains the cheapest liquid biofuel, while the prices of advanced liquid biofuels fall over time, reaching parity with fossil gasoline and diesel by 2030. In the high-cost scenario, because of high feedstock and process costs, advanced biofuels remain more expensive, and only sugarcane ethanol becomes economically attractive (assuming an oil price of USD 130/bbl). Of course, oil prices above USD 130/bbl and carbon prices above USD 50/tCO₂ could significantly improve the competitiveness of biofuels. Recent analyses (IPCC SRREN, [47]) indicate that potential improvements could enable ligno-cellulosic biofuels to compete at oil prices of USD 60-70/bbl with no revenue from CO₂ mitigation.

Some important aspects should be taken into account considering the prices given in Table 3. First, actual prices vary significantly, not only with technology and feedstock, but also with the production scale and local conditions. Secondly, price uncertainty increases with the move from conventional to advanced biofuels. Thirdly, the prices of conventional feedstock are more sensitive to variability of agriculture prices. Fourthly, in the future, access to a broader range of non-food and residual feedstock should improve price stability and competitiveness. Finally, on the other hand, a large-scale production of biofuels would certainly increase the feedstock demand, and large production plants would result in long transportation distances and higher logistical costs. The IEA analysis suggests that the current cost of ligno-cellulosic bioethanol (USD 1.05/lge) and BTL biodiesel (USD 1.1/lge) would be competitive with fossil fuels at oil prices over USD 130/bbl. Regarding competitiveness, it should be noted that fuels from unconventional oil, gas-to-liquid and coal-to-liquid processes are competitive at oil prices of around USD 65/bbl (excluding costs for CO₂ emissions).

As far as algae-based biofuels goes, cultivation and extraction of the raw oil are still expensive processes. The production cost of algae oil (up to 50% of the basic biomass) is also high and uncertain (i.e. from USD 0.75-5 per litre, excluding conversion to biofuel [19]). The lower and higher bounds refer to the cheapest cultivations in open ponds and the most costly photo-bioreactors. Further research is needed to reduce costs, select optimal algae, reduce risks of contamination and scale up the process.

6 For comparison, the global total primary energy supply in 2008 was about 560 EJ.

Potential and Barriers

Biofuel potential and barriers depend basically on biomass resources and policies to either promote or regulate the sustainable exploitation of bioenergy.

Biomass Potential – Estimates of the bioenergy technical potential vary considerably from an optimistic 1,500 EJ/yr by 2050 [20] to more prudent figures of about 500 EJ/yr to recent analyses [21, 47] that estimate the potential feedstock for biofuels and bioenergy production by 2050 at around 85 EJ from agricultural and forestry residues, plus 60 EJ from surplus forest growth and 120 EJ from surplus arable land for dedicated energy crops, with little or no environmental impact⁶. The total potential exceeds the 2050 IEA-projected potential bioenergy demand (i.e. 145 EJ, including 65 EJ for fuels and 80 EJ for heat and power). A key uncertainty in the available estimates is the surplus agricultural land for energy crop cultivation. The global land use for dedicated non-food, ligno-cellulosic energy crops could grow from today's 30 Mha to around 100-160 Mha by 2050, with a significant yield improvement in developing countries. A potential for energy crops, with low risk for soil and water use and no competition with food production and forestry, exists in regions, such as sub-Saharan Africa and Latin America. However, at present Brazil is the only country claiming to have about 200 Mha of unused pasture for sustainable production of energy crops although this is a matter for debate... In countries such as Cameroon, Tanzania and India, the actual potential seems to be lower than previous expectations, and significant investment would be needed for exploitation, while in countries, such as Thailand and Malaysia, the pressure on cropland is already high. Cultivations of perennial energy crops on degraded, semi-arid soils are also under consideration. This could provide biomass feedstock, reduce the erosion and increase the fertility of such areas, but their economic feasibility has yet to be demonstrated. For comparison, according to FAO (<http://faostat.fao.org>), arable land in 2008 accounted for 1.4 Gha out of the some 4.9 Gha of global rural areas. FAO projects a 70% increase in global food demand by 2050 to feed about nine billion people [22] and suggests that 90% of the additional crop demand could be met by higher yields. The arable land for food production is expected to increase in developing countries and decrease in developed regions. An inventory of rural land resources and potential has been developed by FAO and IIASA [23], but further efforts are needed to collect data at national levels. Water availability is also an important issue.

As far as residues are concerned, estimates [24] suggest that around 5 Gt (dry matter) of agricultural residues and 0.5 Gt of forestry residues are currently available for energy production on a global scale (mostly in Asia and America) and that this potential could increase to 6.8 Gt and 0.7 Gt, respectively, by 2030. Using 10% of this biomass for biofuel production would result in 120-150 billion lge of liquid

biofuels (or 220 billion lge of biogas)—almost twice the biofuel demand in 2008 (i.e. 6% of the current total transport fuel demand) and 45-50% of the expected 2030 biofuel demand [25]. In its sustainable energy scenarios, the IEA, projects that biomass could provide about 13.6% of the total primary energy supply (TPES) and 9.3% of total transportation fuel by 2030 [4], and that these figures could increase to 20% and 26%, respectively, by 2050 [5].

Policy Aspects – Promotion of biofuels is part of the overall policy to reduce GHG emissions. Mandates and incentives for blending biofuels with fossil fuels are in place in many countries and contribute significantly to the ongoing growth in biofuel use. However, policy measures should only promote advanced technologies with best performance in terms of land use, GHG reductions and socio-economic impact. Particular support should be granted to biofuel production from residues and to ligno-cellulosic crops grown on non- arable land. As access to water is a growing concern in many countries, priority should be given to energy crops that require little or no irrigation. Water use during the biofuel production process (e.g. 4-8 litres of water per litre of cellulosic ethanol) also needs to be carefully considered. At present, the European Union, the United States and other countries provide financial support for advanced biofuels through grants, loan guarantees and feed-in tariff mechanisms. The US has a specific target for cellulosic biofuels (i.e. 60 billion litres by 2022) while the EU supports ligno-cellulosic fuels, waste- and algae-based biofuels by counting twice the contribution to the 2020 renewable energy and GHG emissions targets. Blending targets or tax credits are also in place in Brazil, China, India, South Africa and Thailand, among others. International quality and sustainability certifications are needed for biofuel and feedstock trading, in particular for developing countries. In the EU, market penetration of biodiesel has been significantly boosted by the establishment of quality standards while sustainability certifications would help regulate the production in developing countries. High costs, poor infrastructure, lack of know-how and inadequate labor skills remain major barriers to biofuel production in developing countries. Methodologies to assess the emissions reductions from biofuels need to be consolidated and shared at the international level, and more reliable data on direct/indirect biofuel-induced land-use change (LUC/ILUC) are needed.

References and Further Information

(This brief is based primarily on references 1, 5, 24, 46.)

1. IEA, 2011, Biofuels for Transport: IEA Technology Roadmap, IEA-OECD, Paris, 2011, www.iea.org/roadmaps.
2. REN21, 2012, Renewables 2012, Global Status Report, Paris, 2012, www.ren21.org
3. Junginger, 2010, Opportunities and Barriers for International Bioenergy Trade, www.bioenergytrade.org.
4. IEA, 2009, World Energy Outlook 2009 (450 ppm Scenario), IEA-OECD, Paris, 2011, www.iea.org.
5. IEA, 2010, Energy Technology Perspectives 2010, IEA-OECD, Paris, 2010, www.iea.org.
6. IEA, 2008, From 1st- to 2nd-generation Biofuel Technologies: An Overview of Current Industry and RD&D Activities, IEA/OECD, Paris, www.iea.org/textbase/papers/2008/2nd_Biofuel_Gen.pdf.
7. UNEP and Bloomberg New Energy Finance, 2010, Global Trends in Sustainable Energy Investment, 2010.
8. Bauen, 2009, Biomass: A Sustainable and Reliable Source of Energy, IEA Bioenergy, <http://www.ieabioenergy.com>.
9. IEA Bioenergy Implementing Agreement, www.ieabioenergy-task38.org.
10. Global Bioenergy Partnership, www.globalbioenergy.org/programmeofwork/sustainability/en/.
11. FAO and UNEP 2010, A Decision Support Tool for Sustainable Bioenergy, www.fao.org/docrep/013/am237e/am237e00.pdf.
12. NRDC 2006, Ethanol: A survey of studies published since 1990, Natural Resources Defence Council and Climate Solutions, New York, USA, p. 8.
13. Mabee, 2006, Update on softwood to ethanol process. Appl. Biochem. Biotechnol. 29, 55-70.
14. ORNL 2006, Bioenergy conversion factors, Oak Ridge National Laboratories, Tennessee, USA, www.ornl.gov.
15. IEA, 2008b, Mid-Term Oil Market Report, IEA/OECD, July 2008.
16. CENBIO 2009, Centro Nacional de Referência em Biomassa, Bioenergy Atlas of Brazil, http://cenbio.iee.usp.br/download/atlas_cenbio.pdf.
17. JGSEE 2009, The Joint Graduate School of Energy and Environment, 2009. Expert opinion based on delivered questionnaire, April 2009.
18. IEA 2009a, Transport, Energy and CO₂: Moving Toward Sustainability, OECD/IEA, 2009, Paris.

19. Darzins, 2010, Current status and potential for algal biofuels production - A report to IEA Bioenergy Task 39 - <http://www.globalbioenergy.org>.
20. Smeets, 2007, A Bottom-Up Assessment and Review of Global Bioenergy Potentials to 2050, Energy and Combustion Science, Vol. 33, pp. 56-106.
21. Dornburg, 2008, Assessment of global biomass potentials and their links to food, water, biodiversity, energy demand and economy, Netherlands Research Programme on Scientific Assessment and Policy Analysis for Climate Change,- <http://www.rivm.nl/bibliotheek/rapporten/500102012.pdf>.
22. FAO, 2008, The State of Food and Agriculture. Biofuels: Prospects, Risks and Opportunities, FAO, Rome.
23. FAO and IIASA, 2000, Global Agro Ecological Zones, www.iiasa.ac.at/Research/LUC/GAEZ/index.htm?sb.
24. FAO, 2009, FAO Statistics 2009, <http://faostat.fao.org>.
25. IEA, 2010b, Sustainable Production of 2nd Generation Biofuels, IEA/OECD, Paris.
26. IEA Bioenergy, 2010, IEA Bioenergy Task 42 – Bio-refinery. <http://www.iea-bioenergy.task42-biorefineries.com/publications>).
27. Accenture, 2007, Irrational Exuberance? An assessment of how the burgeoning biofuels market can enable high performance, Accenture.
28. BRDI, 2008, The Economics of Biomass Feedstock in the United States, Biomass Research and Development Initiative 2008.
29. Brauer, 2008, Cost and Life-Cycle Analysis of Biofuels, Institut für Energetik und Umwelt, Leipzig.
30. E4Tech, 2010, A descriptive approach to modeling the GHG emissions associated with indirect land use impacts of biofuels, UK Department for Transport.
31. ECN, 2009, The Biomass to SNG Process, Energy Centre of the Netherlands, www.ecn.nl/docs/library/report/2009/109088.pdf.
32. FAO, 2003, World Agriculture: Towards 2015/2030. An FAO Perspective, Earthscan Publications Ltd., London.
33. Jank, 2007, EU and US policies on biofuels: Potential impacts on developing countries, German Marshall Fund, Washington, D.C.
34. Küsters, 2009, Energy and CO₂ balance of bio-energy plants and of various forms of bio-energy, International Symposium on Nutrient Management and Nutrient Demand of Energy Plants”, Budapest, July 6-8, 2009.
35. Schmer, 2008, Net energy of cellulosic ethanol from switchgrass, Proceedings US National Academy of Sciences, Vol. 105, No. 2, pp. 464-469.
36. OECD, 2008, Biofuel Support Policies: An Economic Assessment, OECD, Paris, 2008.

37. DBFZ, 2009, Bio-SNG – Demonstration of production and utilization of synthetic natural gas (SNG) from solid biofuels, Deutsches Biomass Forschungszentrum, Final Project Report, Leipzig.
38. USDOE, 2009, Alternative Fuels & Advanced Vehicles Data Center. Energy Efficiency and Renewable Energy, US Dept. of Energy,
39. USDOE, 2010, National Algal Biofuels Technology Roadmap, US Dept. of Energy www1.eere.energy.gov/biomass/pdfs/algal_biofuels_roadmap.pdf.
40. World Bank, 2010, Placing the 2006/08 Commodity Price Boom into Perspective, The World Bank, Washington, D.C.
41. Berndes, 2010, Bioenergy, Land-Use Change and Climate Change Mitigation, www.ieabioenergy.com.
42. FAO, 2009, Algae-based biofuels: A Review of Challenges and Opportunities for Developing Countries, www.fao.org.
43. UNEP, 2009, Towards Sustainable Production and Use of Resources: Assessing Biofuels, www.unep.org.
44. EC, 2010, European Biofuels Technology Platform: Strategic Research Agenda Update 2010; www.biofuelstp.eu.
45. Bacovsky, 2010, Status of 2nd Generation Biofuels Demonstration Facilities in June 2010, A report to IEA Bioenergy.
46. Berndes, 2010, Bioenergy, Land-use Change and Climate Change Mitigation, IEA Bioenergy: 2010.
47. IPCC SRREN, 2011, Renewable Energy Sources and Climate Change, Special Report of the Intergovernmental Panel on Climate Change, Chap. 2.

Table 4 – Summary Table: Key Data and Figures on Biofuel Production Technologies

Technical performance		Typical current international values and ranges									
Energy input	Biomass feedstock, e.g. energy crops, agriculture and forestry residues, and waste oils										
Output	Liquid and gaseous biofuels										
Biofuel Variants Feedstock/Technology	Bioethanol					Biodiesel					
	Cane	Beet	Corn	Ligno cellul.	Rape	Palm	BTL	Adv. HVO	Adv. Algae		
Typical yield, l/dec/ha	3,400	2,800	1,800	2,200	1,500	3,200	3,100	2,000	na		
Co-products	bagasse	pulp	stover	lignin	glycer- ine	glycer- ine	heat	glycer- ine	several		
Co-products, kg/l biofuel	0.25	0.25	0.3	0.4	0.1	0.1	na	0.1	na		
CO2 emission reduction, %	70/105	25/65	-20/60	50/110	15/85	25/80	55/120	15/84	-50/65		
Energy out/input ratio	2.5-3.0	na	1.3-1.6	4.4-6.6	1.3-1.6	1.3-1.6	na	na	na		
Energy conversion effic., %	12%-35% for adv. biofuels, at 20GJ/t dry mass, 110-300 l ethanol or 75-200 l biodiesel/t ligno-cellulosic material										
Major producers	Brazil	EU	US	na	EU, D	na	na	na	na		
Global production, Gt/y	86.1 (2010)	na	na	0.175 ^a	18.9 (2010)	(^a)	(^a)	na	na		
Capacity under constr., Gt/y	na	na	na	1.9 ^a	na	(^a)	(^a)	na	na		
Current market share, %	about 3% of transport fuels, energy basis, using 3% arable land										
Typical plant size, Ml/y	25-150	25	25	0.1-4	25-50	0.1-4	na	na	na		
Plant lifetime, yr	25	25	25	25	25	25	25	25	na		
Global agric. & forest waste	Agriculture residues: 5Gt dry matter/yr.; Forest residues 0.5Gt dry matter/yr										

a) Incl. BTL biodiesel

Costs By feedstock/technology variant	Typical current international values (2010 USD)					
	Sugarcane	Corn	Bioethanol	Adv. Ligno-cellul.	Rapeseed	Biodiesel
Untaxed retail price, \$/lge ^(a)	0.63	0.73	1.05	1.00	1.10	1:10
Typical cost breakdown						
Feedstock,%	60	80	40	90	35	
Process,%	15	15	50	10	50	
Energy, %	25	20	15	10	15	
Co-products, %	0 ^(b)	-15	-5 ^(b)	-10 ^(b)	0	
Plant invest. cost, \$/litre-yr	1.7-2.5 for adv. biofuel plants with capacities between 150 and 50 Ml/yr, respectively					

Data projections By feedstock/technology variant	Typical projected international values and ranges					
	Cane	Corn	Bioethanol	Rapeseed	Biodiesel	
Typical yield (2030-2050)	4,800	2,400	3,700	2,100	3,400	na
Production	8 Glge/yr by 2015; 250 Glge/yr by 2030 (mostly advanced biofuels)					
Market share %	9% of the total transport fuel by 2030, up to 27% by 2050					
Agriculture and forest residues potential (2030)	Agriculture residues: 6.8Gt dry matter/yr; Forest residues 0.7Gt dry matter/yr The use of 10% of such biomass could provide 120-150 Glge/yr of liquid biofuels (or 220 Glge of biogas), i.e. about 50% of the global liquid biofuel demand by 2030.					
Untaxed retail price 2020	0.60-0.70	0.70-0.80	0.90-1.05	0.95-1.10	0.95-1.05	na
Untaxed retail price 2030	0.60-0.70	0.65-0.85	0.80-0.95	0.95-1.15	0.80-1.00	na
Untaxed retail price 2050	0.60-0.75	0.65-0.85	0.75-0.90	0.95-1.20	0.75-0.90	na

* Fossil gasoline price, \$/lge - 0.54 (oil \$75/bbl)

** Assumption: bagasse used as energy input; low market value for lignin and glycerine

Disclaimer

The designations employed and the presentation of materials herein do not imply the expression of any opinion whatsoever on the part of the Secretariat of the International Renewable Energy Agency concerning the legal status of any country, territory, city or area or of its authorities, or concerning the delimitation of its frontiers or boundaries. The term “country” as used in this material also refers, as appropriate, to territories or areas.

The preparation of the paper was led by
Giorgio Simbolotti (ENEA).

Comments are welcome and should be addressed to
Ruud Kempener (RKempener@irena.org),
Giorgio Simbolotti (giorgio.simbolotti@enea.it)
and Giancarlo Tosato (gct@etsap.org)